

DEVONSHIRE
28" H OUTDOOR SCONCE

Imported

Model: 414981-1 | ☆☆☆☆☆ (No reviews yet)

Out of Stock | Ships within : TBD

Free Shipping within the contiguous US

FINISH: Antiqued Bronze *



QUANTITY:

▼ 1 ▲

ADD TO CART

BUY LOCAL




414981-1.jpg

414981-1 • DEVONSHIRE 28" H Outdoor Sconce

28H x 11W x 5D

Large aluminum wall mount coupe in antiqued bronze finish with subtle gold accents and acanthus leaf motif. Features textured seedy glass panes.

TYPE A

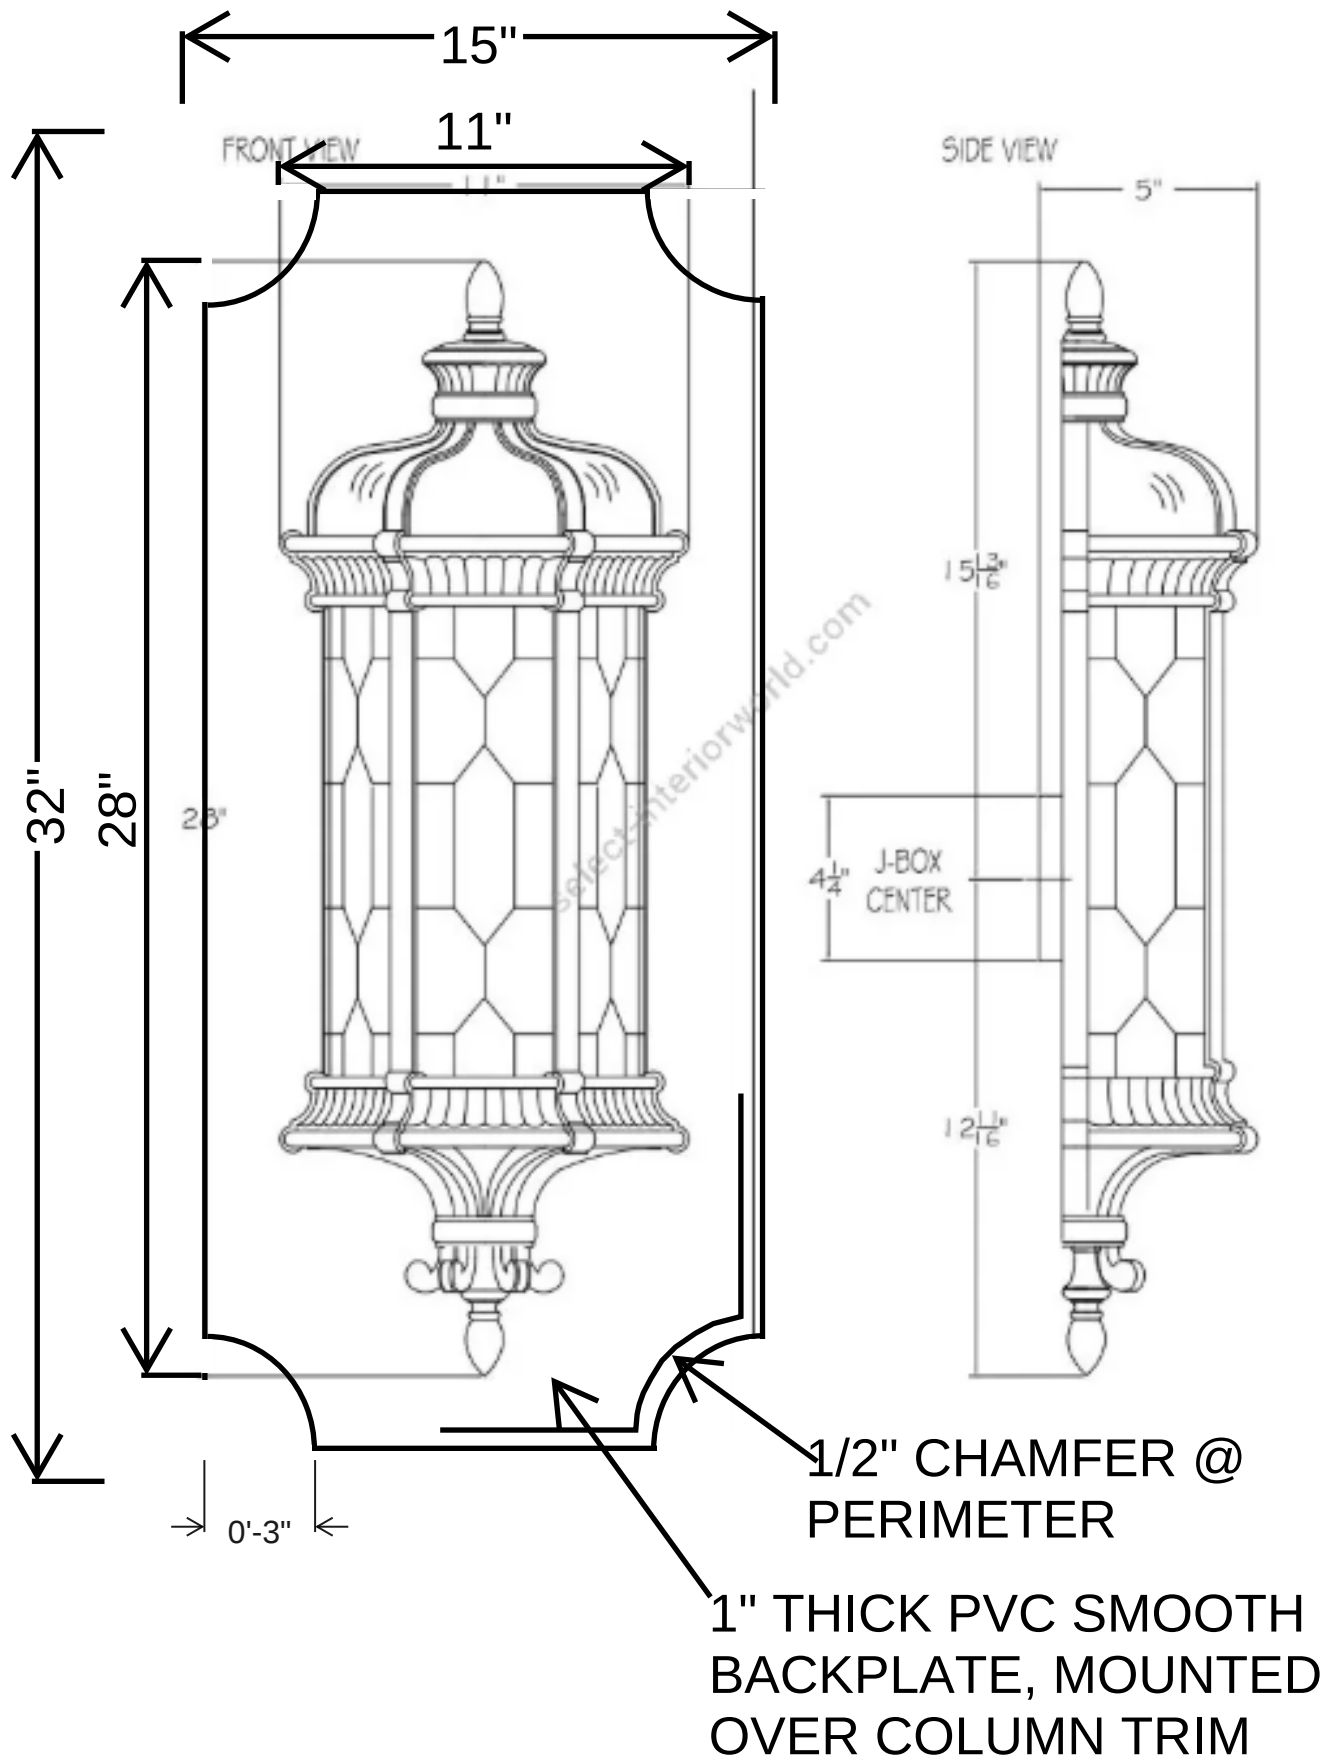

DESCRIPTION

TYPE A

Large aluminum wall mount coupe in antiqued bronze finish with subtle gold accents and acanthus leaf motif. Features textured seedy glass panes.

ADDITIONAL INFORMATION

DOMESTIC

Weight (Lb) 8
Dimensions (in) 28H x 11W x 5D
US Bulb: B 10, 60W, Candelabra, Not Included
Bulb QTY : 3

Country of Origin : Imported
Safety Rating : Meets Applicable UL Standards
Location Rating : Outdoor Wet
Designer : Fine Art Handcrafted Lighting
Ships within : TBD

INTERNATIONAL

Weight (Kg) : 4
Dimensions (cm) : 71.12H x 27.94W x 12.7D
INTL Bulb : B35 E14, 60W, Candelabra, Not Included
Bulb QTY : 3

REFERENCE DRAWINGS

414981_CUSTREF.PDF

DISCLAIMERS

Cancellation & Return Policy

Indoor Fixtures

Fine Art Handcrafted Lighting handcrafts each piece in our factory located in Hialeah, Florida, USA. The manufacturing process starts as soon as the order is placed. FAHL fixtures are made to order, and for this reason, they cannot be exchanged, canceled, returned, or refunded.

Import Outdoor Fixtures

- Return must be requested within 30 days of the invoice/ship date.
- To start a return:
 - Dealers: please contact us at customerservice@finearthl.com.
 - Returns will be accepted only with written consent.
 - We will provide you with an RMA number to note on the boxes.
 - Fine Art Online Purchases: Start your outdoor return [here](#).
- Unauthorized returns will be refused.
- A 25% restocking fee will be applied.
- All products must be returned "as new" in their original Fine Art Handcrafted Lighting packaging and be free of any damages or signs of installation.
- Online purchasers/Dealers are responsible for return freight and original outbound freight. We recommend you buy freight insurance for the return shipment as we will not issue credit/refund if the item (s) has freight damage when received at our factory.
- Upon receipt by Fine Art Handcrafted Lighting, the product will be inspected for "as new" condition. Once confirmed, we will process your return, less the actual outbound shipping charges and restocking fee. Credits/refunds will be issued within ten business days of receipt of the returned product.

Our Finishes: Due to variations in monitors, the colors shown here cannot absolutely represent true quality and color. Prior to ordering, please reference finish samples available through your local showroom or Our customer service department.

Our Studio Glass: Our studio glass is handmade individually in Miami. Slight variations in shape, size and markings are the characteristics that distinguish art glass from mass-produced glass.

RELATED PRODUCTS



DEVONSHIRE
413981-X
39" H OUTDOOR WALL MOUNT
\$2,244.00



DEVONSHIRE
413781-X
23" H OUTDOOR WALL MOUNT
\$935.00



DEVONSHIRE
413881-X
32" H OUTDOOR WALL MOUNT
\$1,529.00



DEVONSHIRE
414483-X
35" H OUTDOOR PIER MOUNT
\$2,112.00

TYPE B



SAINT GEORGE


10" saint george pendant

- **SKU:** SGH-10RM-BZ
- **Finish Shown:** Bronze
- Other finishes available. Please call 708-547-5757 for assistance.
- **Dimensions:** 10W x 24.5H
- **Extends:** 60.5
- **Mounting Base:** 5" X 5"
- **Frame with Overlay:** SGH-10
- **Base Frame:** SGH-10
- **Glass:** RAIN MIST
- **Max Wattage:** 100
- **Number of Bulbs:** 1
- **Type of Bulbs:** Medium
- **UL Safety Rating:** Incand. Damp

SKU: SGH-10RM-BZ

Herwig No.G-424-SB-PR

TYPE C

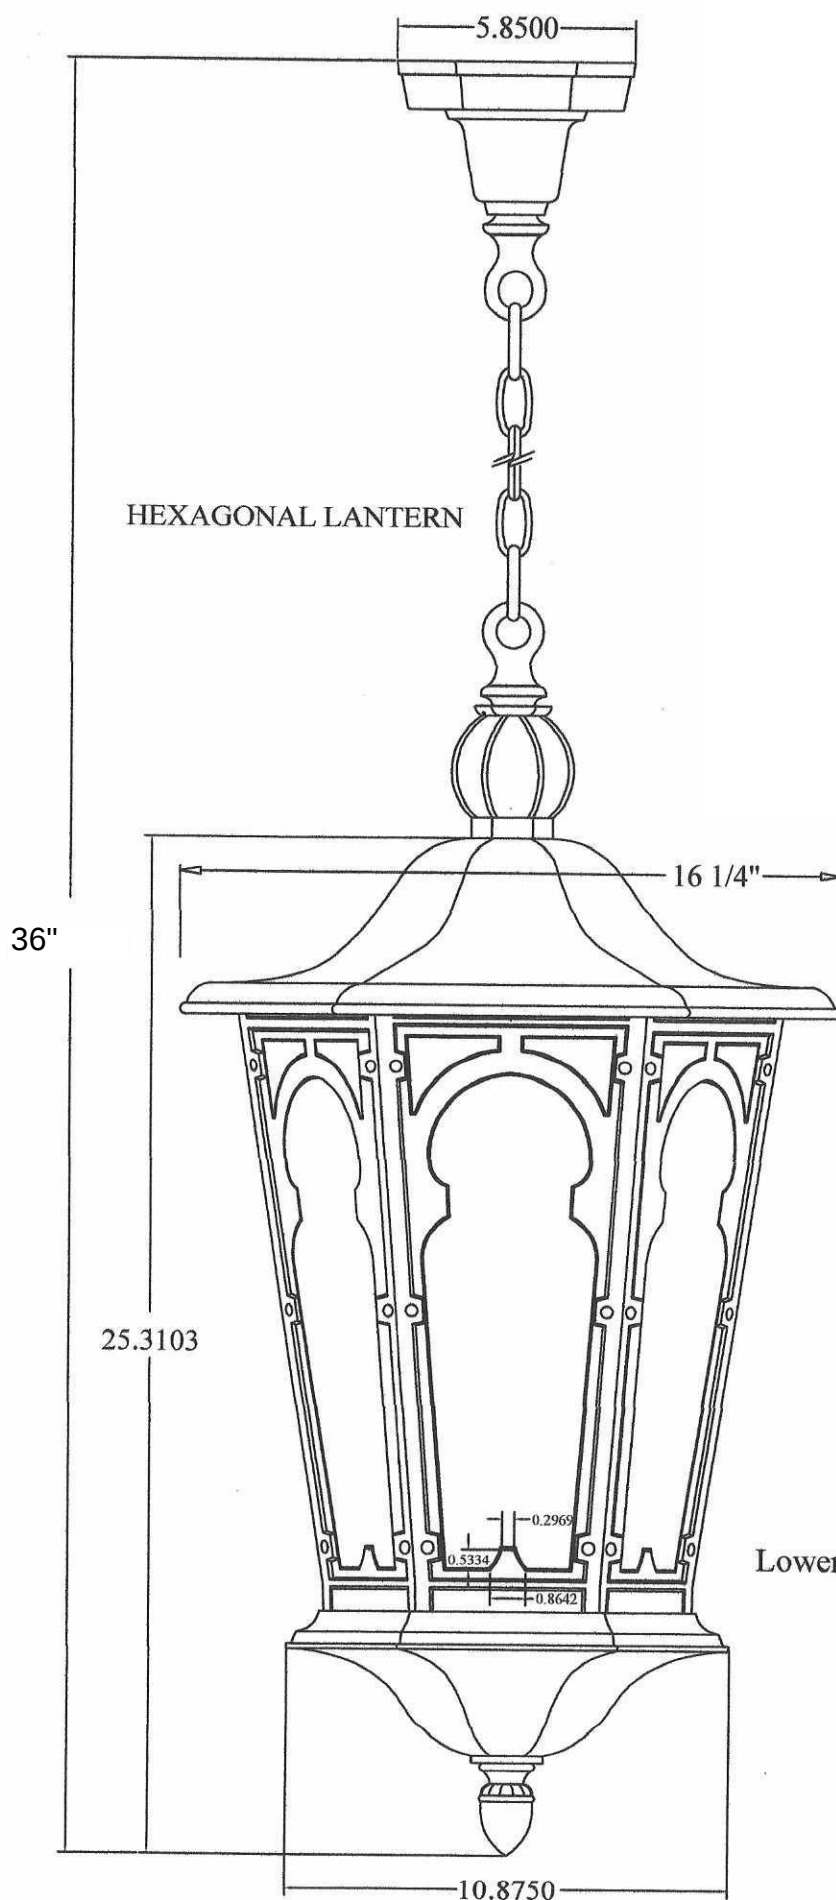


HAIKU

THE WORLD'S SMARTEST FAN JUST GOT BRIGHTER.



Airfoil Finishes

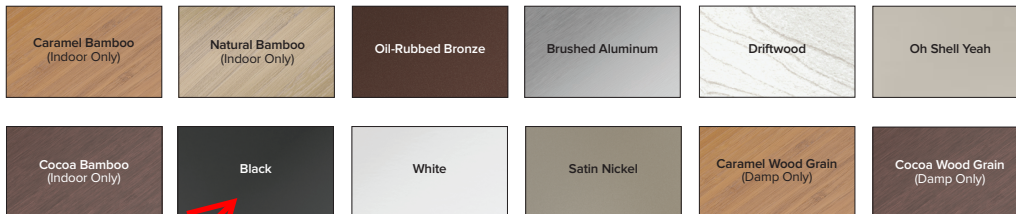

Hardware Finishes



Construction Features


Airfoils	Motor ¹	Controls ²	Onboard Sensors ³	Mounting	Environment ⁴	Accessories
Bamboo (indoor only) or aircraft-grade aluminum	High-efficiency, brushless DC/EC motor Fan Eco Mode	Bluetooth remote Big Ass Fans mobile app Voice control 0–10 V (optional)	Temperature, humidity, and motion sensors enable SenseME Technology	Flat or sloped ceilings 8 ft (2.4 m) or taller Maximum slope: 33°	Indoor or covered damp locations	Haiku Light Kit Chromatic Uplight (indoor only) 0–10 V Module Extended downrod lengths Stabilizer Kit

Ordering Information

Diameter	Environment and Mounting ^{5,6}	Airfoil Material	Hardware Finish	Airfoil Finish ⁷	Motor	Downrod	Region	Downlight	Uplight ⁶
	84 inch Indoor, Universal: 1806 Damp, Universal: 1906			Black: F258 White: F259 Caramel Bamboo ⁷ : F221 Cocoa Bamboo ⁷ : F222 Natural Bamboo: F860					
52 inch: MK-HK4-04 60 inch: MK-HK4-05 84 inch: MK-HK4-07	52 and 60 inch Indoor, Low Profile: 2400 Damp, Low Profile: 2500 Indoor, Universal: 2406 Damp, Universal: 2506	Aluminum: Blank Bamboo: 01	Black: A258 White: A259 Satin Nickel: A470 Oil-Rubbed Bronze: A471 Good As Gold: A850	Caramel Wood Grain: F504 Cocoa Wood Grain: F654 Driftwood: F772 Satin Nickel: F470 Oil-Rubbed Bronze: F471 Brushed Aluminum: F531 Oh Shell Yeah: F277	US, CA, MX: G10 International: G11	12 inch: I12 20 inch: I20 32 inch: I32	US, CA, MX: Blank APAC: R03 GCC: R04	Downlight: S2	Uplight: S80




Shown with low profile mount

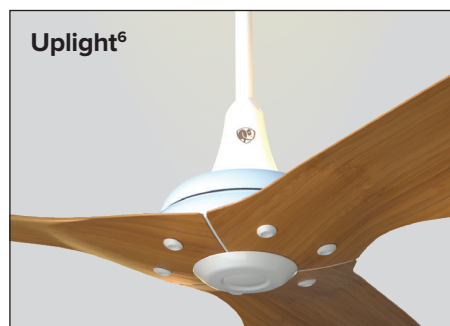

Compatible with universal mount only

Bluetooth Remote

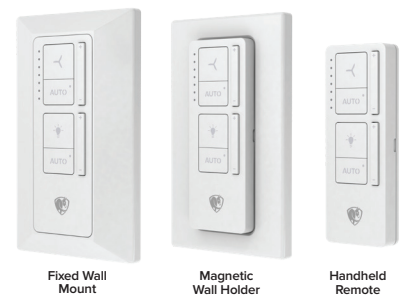

TYPES D1/D2

¹ Activate Fan Eco Mode in Big Ass Fans app to fully leverage the energy savings from your ceiling fan.

² Voice control requires an Amazon Alexa-enabled device or the Google Assistant.

³ SenseME Technology and the Haiku mobile app are supported by Android[™] and iOS[®].

⁴ Damp-rated fans installed in covered outdoor locations must have fixed/permanent full overhead coverage extending at least two feet (61 cm) out from the airfoil tips on all sides. The included fan stabilizer must be installed. Not suitable for salt air environments. Fan must be installed at least 50 miles (80.5 km) inland from coast.

⁵ 52- and 60-inch indoor fans with the both the uplight and downlight must use the universal mount, indoor only (1806). Low profile mount not available for 84-inch fans.

⁶ Uplight not available on damp-rated fans. Compatible with universal mount only. Light kits purchased separately.

⁷ Bamboo finishes are indoor use only.

Lead times may vary.

Warranty period and terms vary by country and application.

FEATURES & SPECIFICATIONS

INTENDED USE — Typical applications include corridors, lobbies, conference rooms and private offices.

CONSTRUCTION — Galvanized steel mounting/plaster frame; galvanized steel junction box with bottom-hinged access covers and spring latches. Reflectors are retained by torsion springs.

Vertically adjustable mounting brackets with commercial bar hangers provide 3-3/4" total adjustment.

Two combination 1/2"-3/4" and four 1/2" knockouts for straight-through conduit runs. Capacity: 8 (4 in, 4 out). No. 12 AWG conductors, rated for 90°C.

Accommodates 12"-24" joist spacing.

Passive cooling thermal management for 25°C standard; high ambient (40°C) option available. Light engine and drivers are accessible from above or below ceiling.

Max ceiling thickness 1-1/2".

OPTICS — LEDs are binned to a 3-step MacAdam Ellipse; 80 CRI minimum. 90 CRI optional.

LED light source concealed with diffusing optical lens.

General illumination lighting with 1.0 S/MH and 55° cutoff to source and source image.

Self-flanged anodized reflectors in specular, semi-specular, or matte diffuse finishes. Also available in white and black painted reflectors.

UGR — UGR is zero for fixtures aimed at nadir with a cut-off equal to or less than 60deg per CIE 117-1996 Discomfort Galre in Interior Lighting. [UGR FAQs](#)

ELECTRICAL — Multi-volt (120-277V, 50/60Hz) 0-10V dimming drivers mounted to junction box, 10% or 1% minimum dimming level available.

0-10V dimming fixture requires two (2) additional low-voltage wires to be pulled.

LUMEN MAINTENANCE — 70% lumen maintenance at 60,000 hours.

LISTINGS — Certified to US and Canadian safety standards. Wet location standard (covered ceiling). IP55 rated. Drivers are ROHS compliant

GOVERNMENT PROCUREMENT — BAA — Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA — Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

PERFORMANCE DATA

LDN4			
Nominal	Lumens	Wattage	Lm/W
500	523.6	5.74	91.2
750	751.1	8.6	87.3
1000	1045	10.58	98.8
1500	1512	17.5	86.4
2000	2006	22.12	90.7
2500	2551	26.1	97.7
3000	3007	32.1	93.7
4000	4212	43	98.0

Notes

Tested in accordance with IESNA LM-79-08

Tested to current IES and NEMA standards under stabilized laboratory conditions


Based on LDN4 AR LSS 35K 80CRI



Catalog Number
Notes
Type

LDN4 STATIC WHITE

4" Open and Wallwash LED Non-IC New Construction Downlight

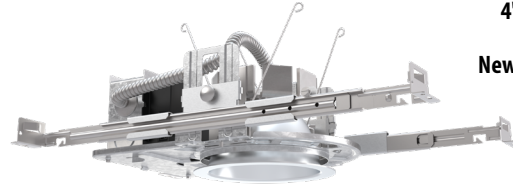


Open Trim




Wallwash Trim

DISTRIBUTIONS





Open



Wallwash

DIMENSIONS

LDN4 500-2000 Lumens



Aperture: Ø 4-5/16" [11]
Ceiling Cutout: Ø 5-1/8" [13] Self-flanged
Overlap Trim: Ø 5-7/16" [13.8]
Ceiling Cutout: Ø 5-1/4" [13.3] Flangeless

See page 4 for other fixture dimensions

TYPE E

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LDN4 35/15 L04 AR LSS MVOLT EZ1

LDN4							
Series	Color temperature	Lumens ‡		Trim Style	Trim Color	Trim Finish	Flange Color ‡
LDN4 4" round	27/ 2700K	05	500 lumens	L04 Downlight LW4 Wallwash	AR Clear	LSS Semi-specular	
	30/ 3000K	07	750 lumens		WR ‡ White	LD Matte diffuse	
	35/ 3500K	10	1000 lumens		TRALTB ‡ RAL painted trim TCPC ‡ Custom painted trim	LS Specular	
	40/ 4000K	15	1500 lumens				
	50/ 5000K						

Voltage		Driver	Emergency ‡		Control Input ‡	
MVOLT Multi-volt		GZ10 0-10V driver dims to 10%	(blank)	No emergency option	(blank)	No control option
120 120V		GZ1 0-10V driver dims to 1%	EL	Emergency battery pack with integral test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS	NPP16D	nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1).
277 277V		D10 Minimum dimming 10% driver for use with SSAIR	ELR	Emergency battery pack with remote test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS	NPP16DER	nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1). ER controls fixtures on emergency circuit.
347 ‡ 347V		D1 Minimum dimming 1% driver for use with SSAIR	ELSD	Emergency battery pack with self-diagnostics, 10W Constant Power, integral test switch. Not Certified in CA Title 20 MAEDBS	N80	nLight™ Lumen Compensation
		EZ1 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 1%	ELRSD	Emergency battery pack with self-diagnostics, 10W Constant Power, remote test switch. Not Certified in CA Title 20 MAEDBS	SSAIR	Wireless standalone embedded control by SensorSwitch
		EDAB eldoLED DALI SOLDRIVE dim to dark	E10WCP	Emergency battery pack, 10W Constant Power with integral test switch. Certified in CA Title 20 MAEDBS	NPS80EZ	nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1).
			E10WCPR	Emergency battery pack, 10W Constant Power with remote test switch. Certified in CA Title 20 MAEDBS	NPS80EZER	nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1). ER controls fixtures on emergency circuit.
			E10WRSTAR	Emergency battery pack, 10W with remote test switch and Iota STAR technology	NLTAIR2	nLight® Air enabled
					NLTAIRER2	nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit, not available with battery pack options
					NLTAIREM2	nLight® AIR Dimming Pack Wireless Controls. UL924 Emergency Operation, via power interrupt detection. Available with battery pack options.

Options

HAO ‡	High ambient option (40°C)
CP ‡	Chicago Plenum
RRL	RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature. Available only in RRLA, RRLB, RRLAE, and RRLC12S.
BAA	Buy America(n) Act and/or Build America Buy America Qualified
90CRI	High CRI (90+)
SF ‡	Single fuse



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.
*See ordering tree for details

(Maximum order quantity for design select lead times is 160.)

‡ Option Value Ordering Restrictions

Option value	Restriction
Lumen Packages	Overall height varies based on lumen package, refer to dimensional charts on page 4
WR, BR	Not available with finish (LSS, LD, LS)
TRALTB, FRALTB	RALTB for pricing only. Replace with applicable RAL number and finish when ready to order. See the RAL BROCHURE for available color options. Not available with TCPC or FCPC
TRW, TRBL	Available with clear (AR) trim color only
TCPC, FCPC	CPC options for pricing only. Custom color chip needs to be sent in to your Customer Resolution specialist before order can be processed. Click HERE for more details. Not available with TRAL or FRAL
347	Not available with emergency options
All Emergency	12.5" of plenum depth or top access required for battery pack maintenance.
NPP16D, NPP16DER	Not available with MVOLT. ER for use with generator supply EM power. Will require an emergency hot feed and normal hot feed.
SF	Must specify 120 or 277 volt
N80	Fixture begins at 80% light level. Must be specified with NPS80EZ or NPS80EZ ER. Only available with EZ10 and EZ1 drivers.
NPP16D, NPP16DER, NPS80EZ, NPS80EZER	Specify voltage. ER for use with generator supply EM power. Will require an emergency hot feed and normal hot feed.
NLTAIR2, NLTAIRER2, NLTAIREM2	Not available with CP, NPS80EZ, NPS80EZER, NPP16D, NPP16DER or N80 options. Not recommended for metal ceiling installations.
NLTAIR2	When combined with EZ1 or EZ10 drivers, can be used as a normal power
SSAIR	Must specify D10 or D1 driver. Not available with nLight options. Not available with CP. Not recommended for metal ceiling installation. Not for use with emergency backup power systems other than battery packs.
HAO	Fixture height is 5-11/16" for all lumen packages with HAO.
CP	Must specify voltage for 3000lm. Not available with emergency battery pack option.
E10WRSTAR	Not available with wet location, EC1, EC6, QDS, CP, 347V, NPS80EZ ER, NLTAIRER2, NLTAIREM2, ALO3 & ALO4 w/DALI, OR 2000-4500 lumens w/SSAIR. Top access installation or 17.5" plenum clearance required for roomside installation. Not available with integral test switch.